


OMNIKEY® 5022 USB Reader

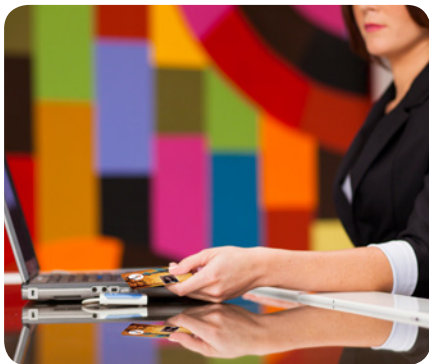

CONTACTLESS HIGH FREQUENCY SMART CARD READER FOR FAT, THIN AND ZERO CLIENTS.

- **Leverage existing employee badge** – Expand the usage of existing physical access cards to computer logon, as well as network and cloud access.
- **Increased security and better user experience** – Read and retrieve highly secure one-time passwords (OTP) from Seos® cards; supports ActivID® Tap Authentication™.
- **Easy to install** – Eliminates the need to install drivers; uses native supported CCID drivers within the operating system.
- **Compact Form factor** – enables two-factor authentication in space-restricted work environments such as healthcare.

Optional Features:

- Color kit (with six different colors)
- Mounting kit including a mounting plate, screw and glue options
- Card holder for card presence requirements

HID Global's OMNIKEY® 5022 enables strong authentication to data and cloud applications, supporting 13.56 MHz credentials such as iCLASS Seos, iCLASS®, DESFire® or MIFARE®.

Typical environments for the reader include healthcare, pharmaceutical, financial services, enterprise, government and other agencies seeking higher security and access management.

The OMNIKEY 5022 read can also be used to meet security and regulatory compliance requirements which mandate two-factor user authentication for accessing workstations and applications. As part of the ActivID® Tap Authentication™ solution, the reader also enhances the user experience and security by allowing user to simply tap a card to a device in order automatically generate an OTP for secure login.

The reader eliminates the requirement for driver installation and is suitable to be used with standard PC or workstations, as well as with thin and zero clients.

By supporting numerous credentials based on common ISO14443 A/B, ISO 15693 standards, the reader is an ideal entry-level choice to support a small footprint.

The OMNIKEY 5022 is interoperable with a number of smart card technologies, tags, and NFC-enabled smart devices, as well as HID Mobile Access® credentials.

The reader is integrated and tested with HID Global's ActivID® Tap™ solution, ActivID® ActivClient, ActivID® Applets, and HID Trusted Tag® Service.

PRODUCT FEATURES:

- For traditional clients as well as thin- and zero client products and solutions.
- Uses native CCID driver from operating system – no additional drive installation required.
- Supports a broad range of operating systems and works with the native CCID driver and PC/SC-API from the operating system.
- Windows, Linux, Apple and Android*.
- Supports contactless smart cards with up to 848 Kbps in the fastest ISO 14443 transmission mode.
- Small and sleek footprint with optional mounting options.
- Global certifications for worldwide usage.
- Interoperable with various smart card technologies, tags and standards such as ISO 14443 A/B, ISO 15693, iClass®, Seos® (OTP only), MIFARE® Classic / Ultralight / Ultralight C / Plus, MIFARE DESFire® / DESFire EV1 / DESFire EV2.
- Support for HID Global solutions : ActivID® Tap™ Authentication Solution, ActivID® ActivClient, ActivID® Applets, and HID Trusted Tag® Service.



SPECIFICATIONS

| USB Smart Card Reader in small form-factor | |
|--|---|
| Base Model Number | OMNIKEY 5022 |
| Contact Smart Card Interface | |
| Protocols | T=CL, MIFARE®, iCLASS® ISO 14443A/B - up to 848 kbps (depending on card) ISO 15693 - up to 26 kbps (depending on card) NFC Tag 1-4* |
| Host Interface | |
| USB Interface | USB 2.0 Full Speed Device (12 MBps) USB 3.0 extended operability, tested with hubs/controllers |
| Connector / Cable | USB Type A connector; 59.1" (150 cm) cable |
| Operating Systems | Windows 10/8.1/8/7/Vista/Server 2012/Server 2008R2 Windows CE (6/7) depending on hardware Linux Debian 6.0+ / Ubuntu 11.04+ / Fedora 15+; Open SUSE 11.4+ Mac OS X; Android™ 4.0 |
| Driver | CCID native driver from operating system (Windows/Linux/Mac) |
| Supported APIs | PC/SC - API |
| Human Interface | |
| Status Indicator | White LED |
| Housing | |
| Housing | Poly Carbonate Body Light Grey / Cover in different colors available Customer-specific logo or colour on request |
| Dimensions | 2.32" x 2.32" x 0.44" (59 x 59 x 11,4 mm) |
| Weight | -70 g (2.5 oz) |
| Operating Conditions | |
| Operating Temperature | 32-158 F (0-70°C) |
| Operating Humidity | 10-95% rH |
| Storage Temperature | -4 - 176 F (-40 - 80°C) |
| Meantime Between Failure (MTBF) | 500.000 hours |
| Compliance Regulatory | |
| Compliance / Certification | USB 2.0 |
| Regional certifications | CE, FCC, UL, KCC, RCM |
| Environmental | WEEE, RoHS2, Reach |
| Ordering Information | |
| Warranty | Two-year manufacturer's warranty |
| Optional | Mounting accessories kit Card Holder for card presence operation |



hidglobal.com

North America: +1 512 776 9000
Toll Free: 1 800 237 7769
Europe, Middle East, Africa: +44 1440 714 850
Asia Pacific: +852 3160 9800
Latin America: +52 55 5081 1650

© 2016 HID Global Corporation/ASSA ABLOY AB. All rights reserved. HID, HID Global, the HID Blue Brick logo, the Chain Design, and ActivID are trademarks or registered trademarks of HID Global or its licensor(s)/supplier(s) in the US and other countries and may not be used without permission. All other trademarks, service marks, and product or service names are trademarks or registered trademarks of their respective owners.

2016-03-24-activid-omnikey-5022-usb-reader-ds-en PLT-02799

An ASSA ABLOY Group brand

ASSA ABLOY

* reader/writer mode only; NDEF format to be implemented by additional software